

---

# ELF RENAULTMATIC D2

---

## DEFINITION

Oil for automatic transmission.

## APPLICATION

Automatic transmissions and power assisted steering on all Renault cars.

Do not use **ELF RENAULTMATIC D2** in the automatic transmission or power-assisted steering fitted to other makes of vehicles.

## PROPERTIES

- The fluidity and lubricity were specifically adjusted to provide the coefficients of friction required for correct operation of the multi-disk clutches in the RENAULT automatic transmission:
  - High visocisty index,
  - very low pour point,
  - good anti-wear, anti-corrosion and anti-foam properties,
  - excellent thermal and chemical stability,
  - good compatibility with seals.
- Ensures accurate and flexible operation of the automatic sequences, even during very low speed manoeuvring and under difficult climatic conditions.
- Keeps the performance at its maximum level throughout the service life recommended by the manufacturer.
- Efficiently protects against wear and corrosion.




# TYPICAL CHARACTERISTICS

CHARACTERISTICS	METHODS	UNITS	ELF RENAULTMATIC D2
Density at 15 °C	ASTM D 1298		0.885
Kinematic viscosity at - 20 °C	ASTM D 445	mm <sup>2</sup> /s (cSt)	< 2400
Kinematic viscosity at 40 °C	ASTM D 445	mm <sup>2</sup> /s (cSt)	36
Kinematic viscosity at 100 °C	ASTM D 445	mm <sup>2</sup> /s (cSt)	7.1
Pour point	ASTM D 2500	°C	- 33

Characteristics of this chart are indicative typical values

## «VISCOSITY-TEMPERATURE» CHART, ACCORDING TO ASTM D 341

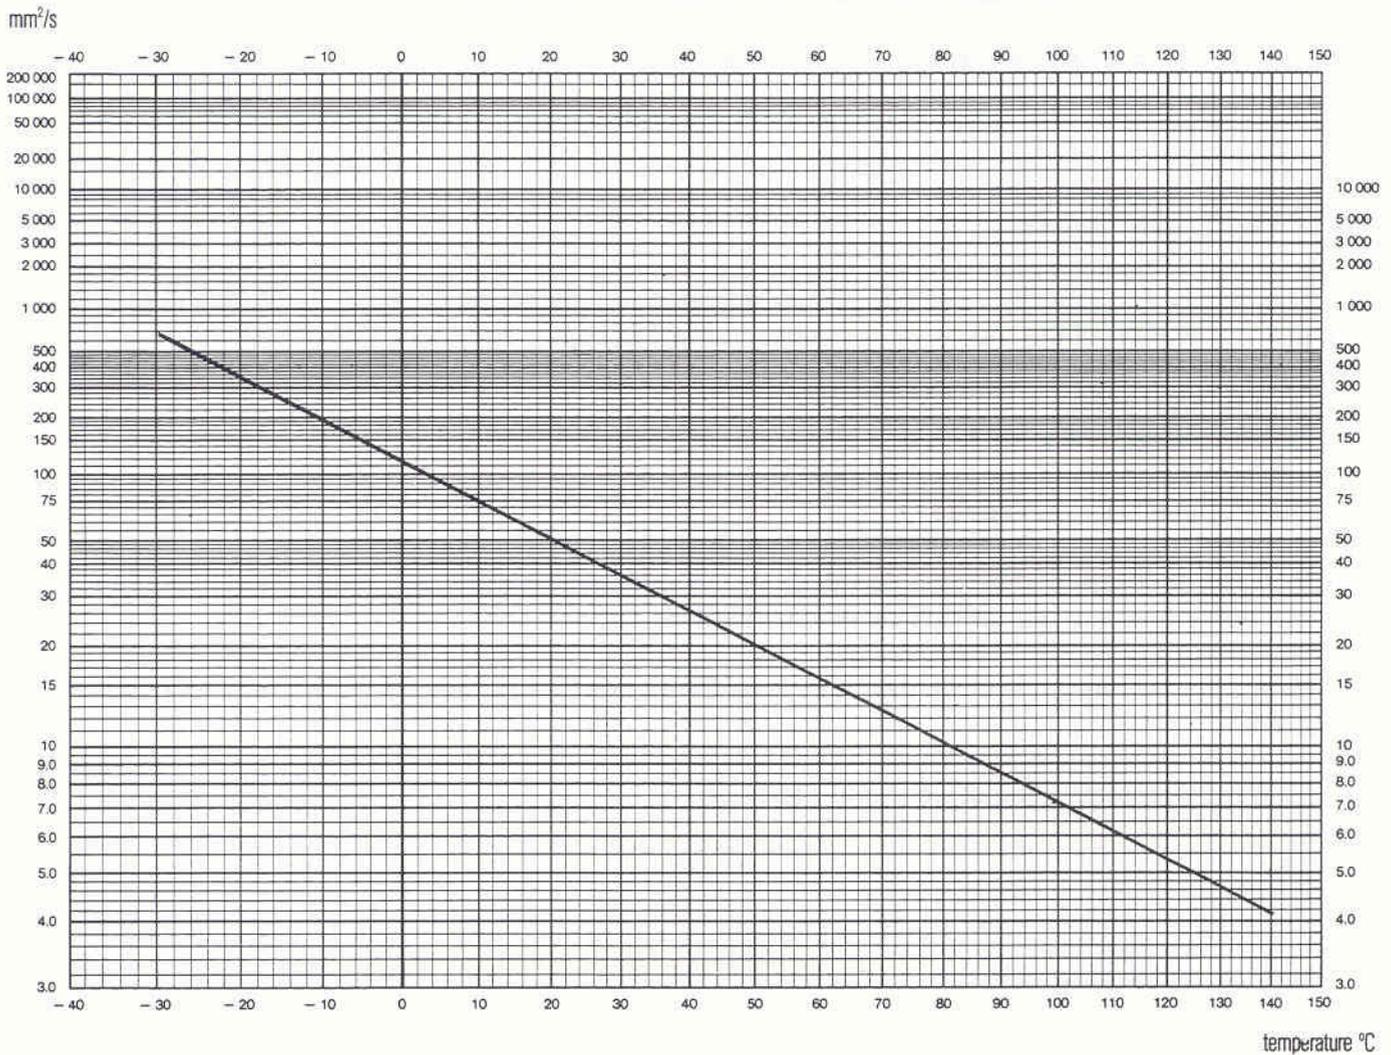

This lubricant used as per our recommendations and for the purpose for which it is intended does not present any significant risk. A safety data sheet as per the applicable regulation within the E.E.C. is available from your local supplier's representative.