


SIDE OPENING ELEMENT TRIM

Front side door trim: Removal - Refitting

72A

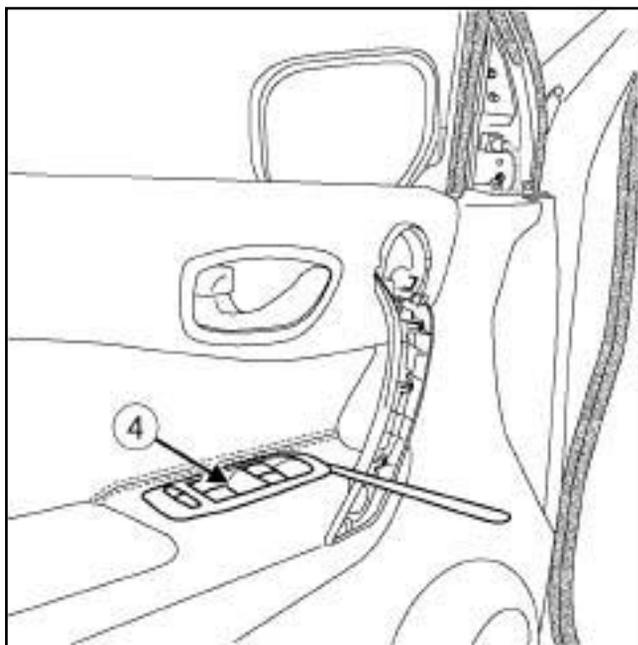

130167

- Remove the control board (4) using the tool (**Car. 1363**)
- Disconnect the supply connectors.
- Remove the front side door trim partially.
- Unclip the interior opening control cable using a flat-blade screwdriver.
- Disconnect the door sill light connector.


REFITTING

I - REFITTING PREPARATION OPERATION

- If necessary, replace the clips on the front side door trim.


II - REFITTING OPERATION FOR PART CONCERNED

- Connect the supply connector (depending on equipment level).
- Clip on the door interior handle cable.
- Refit the front side door trim.

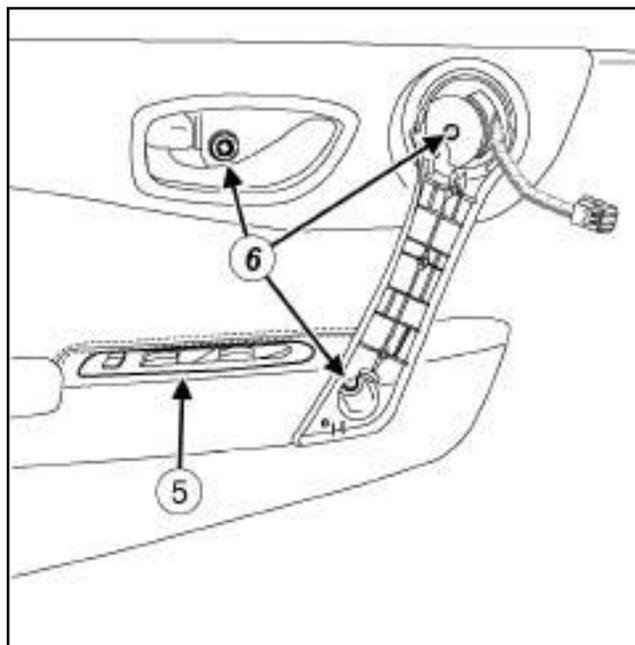

130168

- Connect the supply connector.
- Refit:
 - the control board (5) ,
 - the bolts (6) .

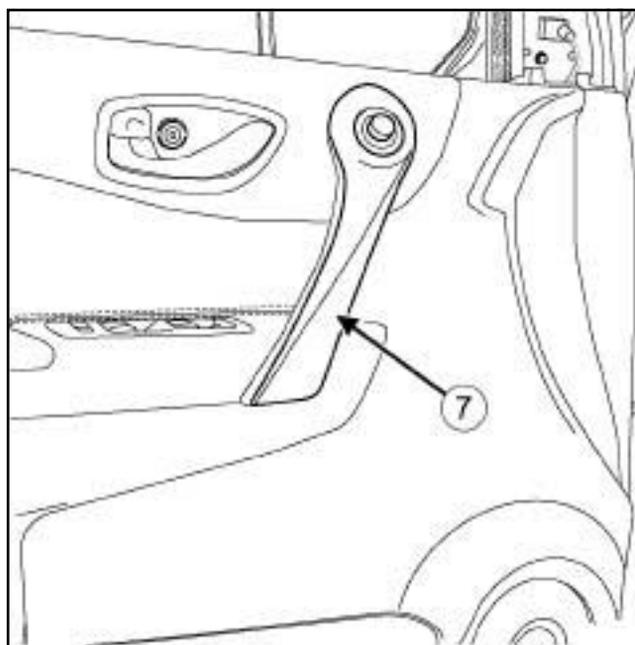

130169

- Connect the door mirror switch connector.
- Refit the trim (7) .

III - FINAL OPERATION.

- Check that it is working correctly.
- Clip the trim (1) onto the door mirror.